Modular Alarm, Monitoring and Control System




Diesel Engine Monitoring and Ship Automation

Expansions for Yachts





Choose Any Feature for Increased Ship Comfort.

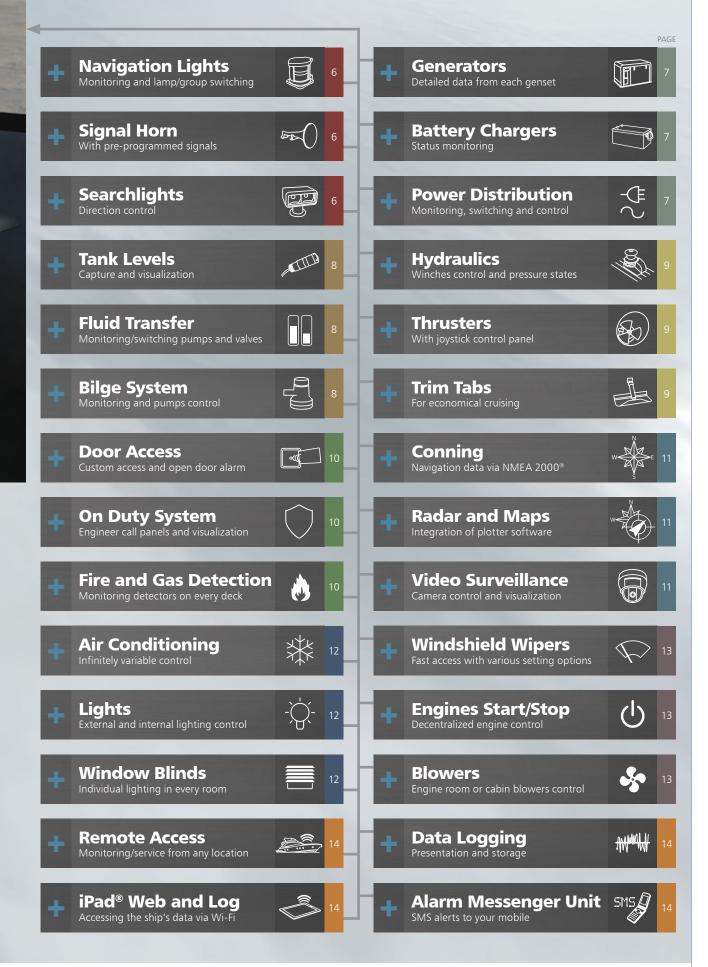

Our Panel PC Systems – Ordered by Size.

10"

15"

19"

24"









AHD 1224 G

24" Panel PC with glass front.

Dimensions (W x H x D)	620 mm x 384 mm x 107 mm
Display resolution	Full HD 1920 x 1080 pixels (16:9)
Viewing angle	Hor. 89/89°; Vert. 89/89°
Luminous intensity	Approx. 1,000 cd/m ²

AHD 1219 G

19" Panel PC with glass front and touch screen.

Dimensions (W x H x D)	454 mm x 384 mm x 107 mm
Processor	1.3 GHz DualCore, 4 GB RAM, 4 GB Flash Disk
Display resolution	SXGA 1280 x 1024 pixels (5:4)
Viewing angle	Hor. 89/89°; Vert. 89/89°
Luminous intensity	Approx. 1,000 cd/m ²

Also available with foil front and without touch screen:

AHD 1219 F

AHD 1215 G

15" Panel PC with glass front and touch screen.

Dimensions (W x H x D)	384 mm x 324 mm x 107 mm
Display resolution	XGA 1024 x 768 pixels (4:3)
Viewing angle	Hor. 70/40°; Vert. 70/70°
Luminous intensity	Approx. 1,600 cd/m² Best readability at all ambient light conditions

Also available with foil front and touch screen:

AHD 1215 F

AHD 1310 G


10" Panel PC with foil front and touch screen

Dimensions (W x H x D)	280 mm x 240 mm x 87 mm
Display resolution	XGA 1024 x 768 pixels (4:3)
Viewing angle	Hor. 178°; Vert. 178°
Luminous intensity	Approx. 1,000 cd/m ²

Also available with foil front and touch screen:

AHD 1310 F

Engine Monitoring on a Large Scale.



Just like in your car: The display provides information about the engine's state, using customary display systems. The engines' data are shown on round instruments and in numeric presentation.






Engines, Bargraphs

The bar graph presentation makes for easier reading of important engine parameters, thus allowing quick visual comparsions.



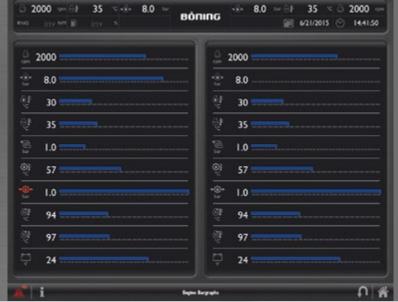

Engines, Digital


Just like having the skipper himself in the engine control room: Access to all engine data at a glance often saves a trip to the engine control room.









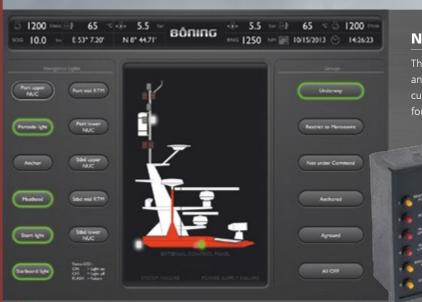

Navigation Lights

The modular system controls and monitors up to 42 navigation and signal lanterns on board vessels. It can be tailored to customer specific requirements. Available in different versions for all conventional voltages, the system can be used with

convetional or LED lanterns.

The lanterns are controlled with an operation panel, which features one operation button and one LED staus light for each lamp circuit.





Signal Horn

Control for one or several signal horns with an operation panel. The signals comply with COLREGS collision prevention regulations.



Searchlights

Operation panel for controlling a searchlight. The functional scope includes the searchlight's orientation in any direction.



Electrical Power Supply.







Handling Liquid Resources.



Tank Levels


Fuel, water, oil, and other resources - as well as waste water and sewage - are carried along in tanks most of the time. Bar graphs display the tanks' filling states.

Also available

Tank spill warning gauges for outdoor installation.





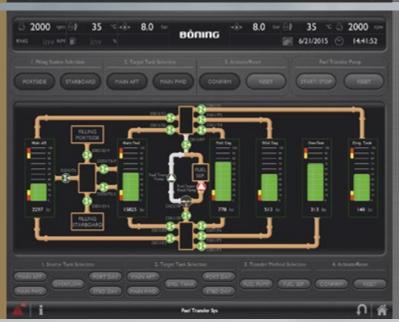

Fluid Transfer

Monitoring and switching of the fluid transfer systems, including tank monitoring and pump states.





Bilge System

Monitoring and switching of the bilge pumps, including alarm and operate mode selection (automatic/manual).



Pressurized Motion.



Monitoring of hydraulic pressures and states. Böning also provides an anchor control panel with convenient up and down controls for operating one or two windlasses.







Thrusters

The thruster panel AHD-TP 2 allows for convenient and individual control of two hydraulically and/or VFD (electrically) operated ABT thrusters. With integrated monitoring by an acoustic signal device.







Trim Tabs

Developed and patented by Böning, the electrohydraulic trim tabs control system was designed for use with fast yachts whose cruising behavior is significantly affected


by controlling the trim tabs.



or dual action electrohydraulic cylinders are controlled with the electronic directional valves of the hydraulic aggregates. Special flow meters converting the movement of the hydraulic fluid into impulses are used for the exact calculation of the trim tab positions.



Watching the Whole Vessel.

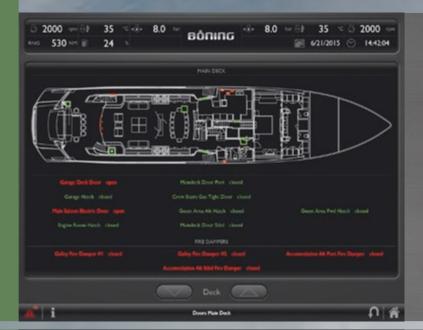

Door Access

Sensors supply data for visualizing the status of doors, hatches, ladders, and windows on a deck arrangement.

Additionally, Böning offers the door access system D.A.C.S., a decentralized door access control system for ships. Transponder key-fobs/cards are verified by the individual electronic door unit to gain access to protected areas. Any change of door status is logged with a timestamp.





On Duty System

The type approved components of the watch standby and engineer call system are used on board ships classified for use with permanently or temporally unmanned engine rooms.

Invalid states (e. g. alarms) and status messages are assigned to alarm or indication groups and to the cabin duty alarm/

engineer call panels and if necessary, to the bridge panel or a bridge display.





Fire and Gas Detection

During a fire, time is critical. Therefore a fast and precise localization of the fire helps the operator and fire guards to take suitable measures. The display pinpoints the exact location of the detected fire.

The system works with several smoke, heat, and gas detectors.



- 4.7 ⊨⊕ 38 ° ⊜

RNG 1250 NOT I 10/15/2013 🕙 14:25:53

Navigating Attentively.

BÖNING

Conning

Conning page with navigational round instruments, such as air pressure, air temperature, humidity, COG, SOG, roll-pitch-yaw angle, and water depth.



0 - 38 · 4.7

100 10.0 to E 53* 7.20*

W S

Radar and Maps

Customized design of a master page with integration of radar plots and/or sea maps, eliminating the need to switch to another device. Furthermore, the radar and maps software can be used in full-screen mode, and with a single press of a button, the user switches back to the Böning automation software.





Video Surveillance

It is good to know what happens on board or in the vessel's close vicinity. Cameras in selected places monitor the corresponding areas. Conveniently controlled from the bridge, the display shows the desired images. Up to four fields can

the desired images. Up to four fields can be viewed simultaneously on the display.









Overseeing Cabin Comfort.



Air Conditioning

Central remote control of the air conditioning system from a single page. Select the room in the deck view, and set the temperature and fan speed.






Lights

A centralized lighting control and monitoring is not only convenient but also efficient. For switching internal and external lights or light groups.



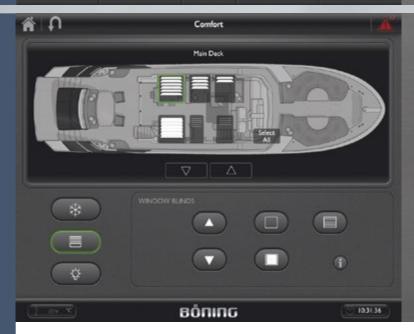

Window Blinds

Remote control for window blinds, displayed in switchable deck views. Infinitely variable for moving the blinds up and down and adjusting the angle of the slats.



The Captain's Convenience and Safety.





Start and stop the engines not only from the bridge but also on the fly. Key controlled starting system with emergency stop.







Blowers

Monitoring and controlling for fans and blowers from a central point.







Mobility and Analysis.



Remote Access

Monitoring and fault detection with a web browser, allows viewing the vessel's current data and sending commands to the ship's system from any location. The Internet access is password protected. To ensure the vessel's safe operation, safety relevant functions, such as starting and stopping the engine, cannot be opened.

Already existing Böning systems can be retrofitted with this remote access system AHD-WNA.






iPad® Web and Log

AHD-WNL (Web and Log) integrates the iPad®, iPhone®, iPod®, and other clients seamlessly into the ship's Böning monitoring and control system. With the corresponding rights, the user can access and control them at any time in the Wi-Fi board network. The visualization on the clients matches the visualization on the ship's displays, thus ensuring familiar, safe operation.

The visualizing software AHD-IAMCS is designed for AHD-WNL with many standard pages for the most common data and control functions. Freely available at the Apple App Store.





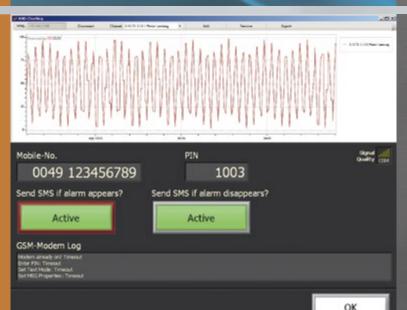

Data Logging

Graphic presentation of AHD-WNL logging data. AHD-WNL logs the data of ship system channels set up during the system configuration viewing on the vessel's displays.

In the graphic presentation, the user can view individual values, move the display curve, enlarge value ranges by zooming, and export their data in XLS (MS Excel®) format.

Alarm Messenger Unit

During an alarm, the GSM-Kit sends a message to a previously entered phone number with detailed alarm information.



The Company. The Staff. Your Benefit.






About us



































As a rule, safety relevant devices and systems are type approved according to Germanischer Lloyd and other classification societies.



Our company is DIN EN ISO 9001:2008 certified.



www.boening.com



- Headquarters in Ganderkesee, Germany
- Branches in the U.S.A., Brazil, Italy, Spain, and Croatia
- Sales and Service Partners
 For a list of our partners, please visit our website
 www.boening.com



Böning Automationstechnologie GmbH & Co. KG

Am Steenöver 4 27777 Ganderkesee Germany

Phone: +49 4221 9475 0 Fax: +49 4221 9475 22 Email: info@boening.com