
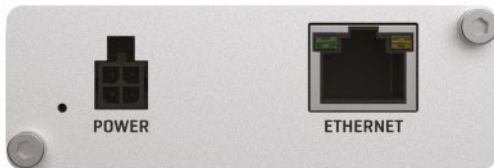


# B:Connect Gateway

## Industrial LTE Gateway

- Compact, lightweight, and energy-efficient industrial gateway equipped with LTE Cat 4 capabilities, Gigabit Ethernet interface, digital Inputs/Outputs and micro-USB port
- Due to its compact design, this product is perfect for projects and applications where single systems require reliable internet connectivity
- Especially engineered for use in the industrial sector with a wide range of software security features, such as SMS control, Firewall, Open VPN, IPsec, Remote Management System (RMS), and FOTA support

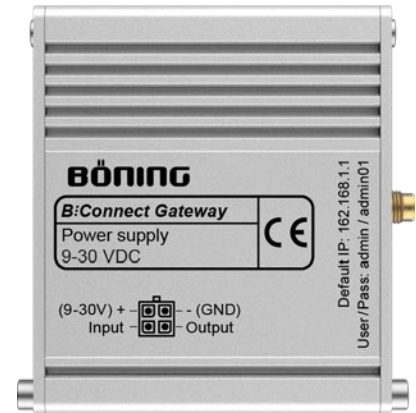

## Specifications

Mobile	4G/LTE (Cat 4), 3G, 2G
Powering Option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna Connector	1 x SMA for mobile
Ethernet	1 x 10/100/1000 Ethernet port
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	75 x 25 x 65 mm
Weight	134 g

### Böning Automationstechnologie GmbH & Co. KG

Am Steenöver 4  
27777 Ganderkesee  
Germany

Phone: +49 4221 9475-0  
Fax: +49 4221 9475-222  
Email: [info@boening.com](mailto:info@boening.com)

Texts and illustrations non-binding. Changes may be made due to technical improvements without further notice.

